



Mobility Considerations Checklist Guide

**Guide for completing the Project Mobility
Considerations Checklist (Form# 735-9983)**

May 2026

Mobility Considerations Checklist Guide

ODOT is an Equal Employment Opportunity and Affirmative Action Employer.

This information can be made available in alternative format by contacting 503-934-1624.

ODOT does not discriminate on the basis of disability in admission or access to our programs, services, activities, hiring and employment practices. Questions: 1-877-336-6368 (EEO-ODOT) or through Oregon Relay Service at 7-1-1.

Oregon Department of Transportation

Statewide Project Delivery Branch

Project Development Section

555 13th St. NE

Salem, Oregon 97301

503-986-3457

Statewide Mobility Program Website:

<https://www.oregon.gov/odot/ProjectDel/Pages/Mobility.aspx>

Table of Contents

BACKGROUND & PURPOSE	1
Why the Checklist is important.....	1
Who completes the Checklist and when.....	1
Impacts Shared with the Mobility Advisory Committee	2
Final Signed Checklist Included in PS&E Submittal Package.....	3
Using the Checklist during Construction.....	3
SECTION 1: PROJECT INFORMATION.....	5
Project Information Fields.....	5
Checklist Revisions.....	5
Key Project Review Dates	6
Impact on Mobility	7
SECTION 2: PROJECT INFORMATION, DURATION & HOURS.....	8
Section 2, Question 1.....	8
Section 2, Question 2.....	8
Section 2, Questions 3 & 4.....	8
Section 2, Question 5.....	9
Section 2, Question 6.....	9
SECTION 3: WORK ZONE SAFETY CONSIDERATIONS.....	10
Section 3, Question 1.....	10
Section 3, Question 2.....	10
Section 3, Question 3.....	10
SECTION 4: LANE CLOSURE/WIDTH RESTRICTION CONSIDERATIONS	11
Section 4, Question 1.....	11
Section 4, Question 2.....	12
Section 4, Question 3.....	13
Section 4, Question 4.....	13
Section 4, Question 5.....	14
Section 4, Questions 6 & 7.....	14

Mobility Considerations Checklist Guide

SECTION 5: ROAD CLOSURE CONSIDERATIONS.....	15
SECTION 6: RAMP CLOSURES/WIDTH RESTRICTIONS CONSIDERATIONS....	15
Section 6, Question 1.....	15
Section 6, Question 2.....	15
Section 6, Question 3.....	16
SECTION 7: DETOUR ROUTE CONSIDERATIONS.....	16
Section 7, Question 1.....	16
Section 7, Questions 2 & 3.....	16
Section 7, Question 4.....	16
Section 7, Question 5.....	16
Section 7, Question 6.....	17
Section 7, Question 7.....	17
Section 7, Question 8.....	17
Section 7, Question 9.....	17
Section 7, Questions 10 & 11.....	17
SECTION 8: SPECIAL DETOUR ROUTE CONSIDERATIONS.....	17
SECTION 9: CRITICAL ROUTE PAIR CONSIDERATIONS	18
SECTION 10: HEIGHT, LENGTH & WEIGHT CONSIDERATIONS.....	19
Section 10, Question 1.....	19
Section 10, Question 2.....	19
Section 10, Question 3.....	19
SECTION 11: MOBILITY COMMUNICATIONS CHECKLIST	20
SECTION 12: ADDITIONAL COMMENTS/NOTES	22
SECTION 13: SUBMITTAL INSTRUCTIONS.....	22
SECTION 14: SIGNATURES.....	22
FAQs	23
LINKS TO OTHER DOCUMENTS & WEBSITES.....	26

This page has been intentionally left blank.

BACKGROUND & PURPOSE

Why the Checklist is important

Potential impacts to freight and traffic must be considered when a project is early in the development phase. The [Mobility Considerations Checklist](#) (ODOT Form# 735-9983) is a fundamental part of this process for reviewing mobility impacts and, if necessary, providing for stakeholder input through the [Mobility Advisory Committee](#) (MAC).

The Checklist is used during both project development and project construction (e.g., with a change order request). Completion of the Checklist requires potential temporary construction impacts be assessed for:

- Critical Route Pairs;
- Delay;
- Road closures;
- Lane or ramp closures;
- Vertical clearance;
- Length restrictions;
- Width restrictions;
- Weight restrictions;
- Local/special events;
- Holiday travel days; and
- Detours/on-site diversions.

Completion of the Checklist is required for all state and federally funded projects on state highways, at the project development stage through construction, per the [Mobility Procedures Manual](#) and [Project Delivery Operational Notice PD-16](#).

Who completes the Checklist and when

Per Note 1 at the top of the Checklist, Transportation Project Managers, Resident Engineers, Resident Engineers - Consultant Projects and Project Delivery Teams are responsible for completing this checklist initiated and signed by a Transportation Project Manager during the project development phase.

If a project has mobility impacts, the project team must provide the Checklist to the Mobility Services Team (MST) for review and, if necessary, provide for [MAC](#) input. The Project Review Criteria in [Appendix C](#) of the [Mobility Advisory Committee Charter](#) are used by the Mobility Services Team to determine which projects are shared with the committee, and how they are shared (e.g. via formal presentation or via email). The MST facilitates conversations through email or meetings.


Mobility Considerations Checklist Guide

When submitting a Checklist to the MST for review, it must be accompanied by a Transportation Management Plan (TMP), Traffic Control Plan (included in the TMP) and [Work Zone Decision Tree form](#) (WZDT). The Mobility Services Team cannot review a Checklist without these required documents. Note that the Mobility Services Team might also request a copy of the allowable full, lane, or ramp closure days, hours and months per the standard specifications (0220.40(e)).

The Region Project Lead or designee should plan to submit complete and accurate documents at least 120 days before their Region target date for receiving a signed Checklist (and before the end of the Advanced Plans milestone). The 120-day period is derived from the following:

- At least 60 days are needed for the Mobility Services Team to conduct its review, share (if necessary) with the Mobility Advisory Committee and return a signed Checklist back to the Project Team.
- An additional 60 days are provided as a contingency buffer for the Region in the event there are design changes after the Checklist is signed or if the Region requires a final review by management prior to PS&E submittal.

Figure 1: Timeline showing the 120 day review process for Mobility Considerations Checklists.

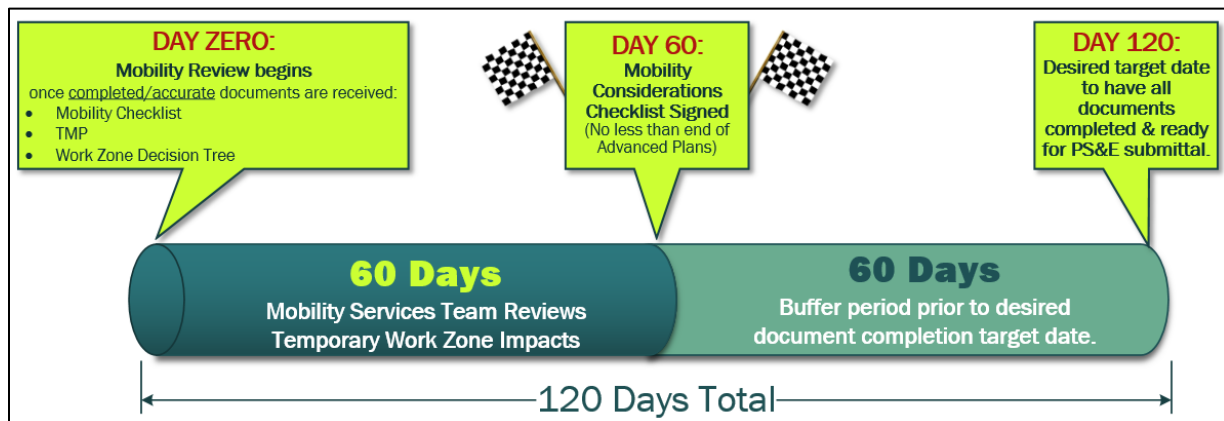

Impacts Shared with the Mobility Advisory Committee

Depending on the severity of the temporary impacts in your Checklist, the Mobility Services Team will recommend one of the following actions based on the Project Review Criteria in [Appendix C](#) of the [MAC Charter](#):

- **Low Impact:** These projects can be reviewed by the Mobility Services Team without sharing with the MAC and signed off directly by the Mobility Program Manager.
- **Moderate Impact:** These projects can be shared with the MAC via email and then signed off by the Mobility Program Manager once the committee provides its support.
- **High Impact:** These projects are required to be shared at a MAC meeting. If (after reviewing your Checklist) the Mobility Services Team recommends sharing your

Mobility Considerations Checklist Guide

impacts at a MAC meeting, your project team will need to prepare a presentation using the [Temporary Impacts PowerPoint Presentation Template](#) and submit an [agenda request form](#) on the internal [Mobility SharePoint site](#) to schedule your presentation for an upcoming MAC meeting. Agenda presentation materials are due 3 weeks prior to the meeting date. (Templates and other resources for preparing for a MAC meeting are available [on this page](#) of the Mobility SharePoint site.).

Final Signed Checklist Included in PS&E Submittal Package

The Project Team includes the final, signed Checklist, TMP and WZDT in the PS&E Package that is submitted to the Project Controls Office. The team also provides the signed Checklist to the Resident Engineer when transitioning the project to the construction phase. The finalized documents are eventually submitted to eBids for prospective bidders to understand the safety and mobility expectations for the project that were discussed during Project Development.

If there are any additional project changes made prior to PS&E that impact mobility (including Special Provisions to Standard Specifications), the project team must re-engage with the Mobility Services Team provide for stakeholder input (if necessary) on the changes and update the Checklist as appropriate.

Off-system projects that create a mobility impact on the state system must also comply with PD-16 and the Checklist. Transportation Project Managers with projects (both on-system and off-system) that have no mobility impacts should check the “No Mobility Impacts” box and sign the checklist (Mobility Program Manager signature is not required for a “no mobility impact” project) before submitting it with the PS&E package. (Refer to [Section 1: Impact on Mobility](#) for a definition of “no mobility impact.”)

Using the Checklist during Construction

Prior to construction, the Resident Engineer and construction staff should familiarize themselves with the Checklist, TMP and WZDT.

During Construction, any Highway Restriction Notices submitted (or updated) for a project should be consistent with the restriction plans and stakeholder commitments documented in the project’s Mobility Considerations Checklist and TMP.

Per the Mobility Procedures Manual, the Resident Engineer is responsible for reviewing and approving the adequacy of information in the *Highway Restriction Notice* ([form 734-2357](#)) as submitted by the contractor (at least 35 days prior to work beginning). Once reviewed and approved, the Resident Engineer (or Region designee) enters the temporary size and weight restrictions into the Commerce and Compliance Division’s Oregon Routing Information Online (ORION) system. A [Highway Restriction Notice Procedures for Construction and Maintenance Work Manual](#) is also available for Resident Engineers for additional guidance.

Before agreeing to proposed changes from the Contractor that have the potential to adversely affect mobility or run counter to previous mobility agreements made during project

Mobility Considerations Checklist Guide

development, the Resident Engineer must discuss the proposed changes with the Contractor, Region Mobility Liaison, and any relevant region resources to determine if the change is warranted and supported by the Region.

If supported by Region, Resident Engineers must:

1. Engage the Mobility Services Team to discuss and obtain concurrence with the potential changes before any agreements are made with the contractor
2. Document Mobility Program and Mobility Advisory Committee support of any potential new restrictions or other changes that impact mobility, and provide a copy of the documentation to the Region Mobility Liaison.¹

These steps for communicating proposed changes must be followed before submitting restriction notices. The Highway Restriction Notice Form is not intended to be used to communicate proposed changes to the Mobility Services Team.

If the Resident Engineer determines the Highway Restriction Notice Form to be incomplete or inconsistent with the Mobility Considerations Checklist and other supporting documentation, the restriction notice form will be returned to the Contractor to rework and resubmit.

¹ Contact information for the Region Mobility Liaisons can be found on the [Mobility Program Website](#).

SECTION 1: PROJECT INFORMATION

Project Information Fields

Complete all of the project information fields at the top of Section 1.

Figure 2: Project information fields

SECTION 1	
PROJECT NAME	KEY NUMBER
EXPENDITURE ACCOUNT NUMBER	
HIGHWAY NAME AND NUMBER	
ROUTE NUMBER	
MILE POST RANGE	
DESCRIBE "TYPE" OF PROJECT (E.G. ADA, CULVERT, BRIDGE DECK REPAIR, PRESERVATION, ETC.)	

For the **HIGHWAY NAME AND NUMBER** and **ROUTE #**, a [cross-reference table](#) of highway names, numbers, and route numbers is available.

Checklist Revisions

If there are any changes to traffic control plans that result in new restrictions or run counter to the mobility impacts that were signed off in the previous checklist, an updated checklist with the proposed revisions must be submitted to Mobility Services Team (MST) for review.

There is no need to make a copy of the original, signed checklist to make revisions.

If you need to make changes, simply open the original signed checklist and check one of the eight revision checkboxes on the first page of the form.

Check the first box if this is the first revision being made since the original was signed off. If the checklist needs to be updated several times after the first revision, additional checkboxes are provided to track each successive change as needed.

When a checkbox is marked, it will open new blank text entry fields under each originally completed field so that updated information can be entered as appropriate. The revision fields are labeled to correspond to the revision number that was checked at the top of the form (e.g. Revision 1, Revision 2, Revision 3, etc.). Text that is entered into these revision fields will be **red** in color to distinguish the new information from the original response that was entered and signed off into the form.

Once a revision box is checked, you will need to:

Mobility Considerations Checklist Guide

1. Provide a summary of the reason for the revision in the provided field that appears below the checkboxes. Provide a brief explanation here as to why the change is needed and a summary of what mobility impacts are changing. Example - *Work in Stage 2 is taking longer than anticipated due to relocation of a water main, and the contractor needs to extend the lane closures by an additional month.*
Also include an updated Expenditure Account number in this field, if it has changed since the previously signed checklist (for example, if the project is now charging a construction E/A).

Figure 3: Screen shot showing the Revision Reason field for providing a summary of why the change is needed and what impacts are changing.

☒ Rev. 1	☐ Rev. 2	☐ Rev. 3	☐ Rev. 4	☐ Rev. 5	☐ Rev. 6	☐ Rev. 7	☐ Rev. 8
Revision 1 Reason: (Provide an updated E/A if applicable)							

2. Provide any changes to either the PS&E date and/or Advanced Plans Due Date (if applicable). Also, indicate when you would like to receive a signed/revised checklist back from the MST after they complete their review of the changes.

Figure 4: Screen shot showing the revised date fields.

PS&E DATE (REVISED) Update this date, if applicable	ADVANCED PLANS DUE DATE (REVISED) Update this date, if applicable	*REGION TARGET DATE FOR RECEIVING A SIGNED REVISED CHECKLIST Provide a sign-off date for the revision here.
---	---	---

3. Provide the revised information to each question in the form as appropriate. For impacts that are not changing, enter "N/A" or leave the revision field blank.
4. At the conclusion of the Mobility Services Team review of the revised checklist, the Region Project Lead and the Mobility Program Manager will sign the additional signature block at the bottom of the form.

Key Project Review Dates

The dates entered in this section are used to ensure the Mobility Services Team will meet its deadlines for providing a signed (original) Checklist, and for tracking performance measures established for the program. As indicated in the instructions in this section, project teams should submit a complete and accurate Checklist (accompanied by a TMP and Work Zone Decision Tree) at least 120 days prior to the Region's target date for receiving a signed Checklist.

Figure 5: Key Project Review Dates on the Mobility Considerations Checklist

PS&E DATE	*REGION TARGET DATE FOR RECEIVING A SIGNED CHECKLIST	ADVANCED PLANS DUE DATE
*In the absence of a region target date, the Mobility Services Team will default to the Advanced Plans Due Date for providing a signed checklist.		

Mobility Considerations Checklist Guide

Provide a date in each of the three boxes as follows. Update these dates as appropriate if the Checklist needs to be revised.

- **PS&E Date:** This refers to the date when the project documents (including the Checklist) are provided to the Project Controls Office for processing of PS&E submittals (*Plans, Specifications, and Estimates*) in preparation for contracting by the ODOT Procurement Office. The other two dates provided in this section should be earlier than the PS&E date.
- **Region Target Date for Receiving a Signed Checklist:** This date should be 120-days after the date you submit your complete and accurate original Checklist to the Mobility Team. If no Region Target Date is provided, the Mobility Services Team will default to the Advanced Plans Due Date for providing a signed Checklist. **Note:** *A new target sign-off date will need to be provided, if the checklist needs to be revised after it is initially signed off.*
- **Advanced Plans Due Date:** A final (signed) Checklist is due no later than Advanced Plans phase. This date should not be earlier than the Region Target date and not later than the PS&E date.

Impact on Mobility

Indicate if there are mobility impacts, based on your responses to the questions on the form.

Keep in mind - impacts to mobility apply to both on-system projects, and off-system projects that could impact the state system. (An example of an “off-system” project would be a city/county road project that involves a ramp connecting to a state highway.)

“No Mobility Impacts” means all of the following:

- No permanent reductions in vehicle carrying capacity are planned on a reduction review route subject to review under Oregon Revised Statute 366.215.
- No vertical clearance reductions.
- No width restrictions, meaning the following minimum horizontal clearance will be maintained at all times² (or all unannounced oversize loads can be safely accommodated (on non-Interstates only) by moving traffic control devices and equipment out of the way with minimal delay to provide the required horizontal clearance):
 - 28-feet between barrier (including any paved shoulder) for two lanes; or,
 - or 22-feet for a single lane.
- No full road closures or ramp closures.
- No lane shifts or lane closures underneath structures will divert traffic into a travel lane with less vertical clearance.
- No weight restrictions.

² There are some routes where the existing roadway is narrower than the minimum horizontal width needed for there to be no restriction notification required. In situations like this, contact the Mobility Services Team so we can have a conversation about your project and confirm any impacts to mobility.

- No length restrictions.
- No detours or on-site diversions.

If your project has no mobility impacts, no signature is needed from the Mobility Program Manager. Contact the [Mobility Services Team](#) if you have any questions determining mobility impacts for your project.

Figure 6: Check boxes used to indicate if there are impacts to mobility.

Impact on Mobility	
☐ No Mobility Impacts See mobility considerations below to determine. MCTD signature is not required for a project that has no mobility impacts.	☐ Mobility Impacts Describe all mobility impacts on worksheet below.

SECTION 2: PROJECT INFORMATION, DURATION & HOURS

Section 2, Question 1

For questions one and two, provide the anticipated start/end date for the project, as well as the construction season and years. The start/end date should span the entire project and not just the duration of a single stage or anticipated highway restriction. This information is used to help determine if there are potential conflicts with other projects.

Section 2, Question 2

List each stage and/or phase of the project, and for each one provide the following:

- a. Mile point range and duration.
- b. Provide the closure days, hours and months for the allowable full road closures, lane or ramp closures that will be specified in [Oregon Standard Specifications for Construction](#) - Number 00220.40(e). When closures are allowed, Section 00220.40(e) defines the time frames when traffic lanes can be closed, and when they must be kept open (such as for holidays and special events). **It is important that the closure information provided in the Mobility Considerations Checklist matches the information included in the Specifications.**

Note: Be prepared to provide a copy of the Section 00220.40(e) Standard Specifications if requested by the Mobility Services Team, or you can provide a copy when submitting the Checklist to the team for review.

Section 2, Questions 3 & 4

For question three, list the construction seasons and years when the project is anticipated to take place.

Mobility Considerations Checklist Guide

For question four, consider if windows of unrestricted freight movement can be provided between stages, particularly for projects that have restrictions in place over a long duration. Are there times when work will not be taking place that traffic control devices can be removed to allow unrestricted movement? Will there be times when a certain type of work is being done that doesn't require restrictions? Has the project team considered contracting methods to limit closures and restrictions so they can only take place during specific windows?

Unrestricted means:

- There are no restrictions on width, height, weight, or length;
- There are no ramp closures or full road closures
- There are no lane shifts or lane closures underneath structures will divert traffic into a travel lane with less vertical clearance.
- There are no detours or diversions.

Section 2, Question 5

Indicate if the project is on a route that is being used as a detour for another project, and if so, is coordination taking place to address conflicts?

Your Region Mobility Liaison can determine if your project is on a designated detour route for another project and can help with coordination. Per the [Mobility Procedures Manual](#), the Region Mobility Liaison is responsible for collecting data on existing or proposed detour routes, and identifying and developing resolution strategies for schedule and delay threshold conflicts that affect corridor mobility.

Section 2, Question 6

This question is intended to make sure that projects with proposed permanent reductions in vehicle-carrying capacity on [Reduction Review Routes](#) subject to ORS 366.215 have already gone through a Stakeholder Forum Review Process required in [Administrative Rule](#). (Refer to the [ORS 366.215 Implementation Guidance Manual](#) for more information on this process.)

Examples of permanent structures that can result in a reduction in vehicle-carrying capacity under this statute could include, but are not limited to, bridge structures, traffic signals, signposts, stationary bollards, curbs, bulb-outs, trees, raised or depressed medians, pedestrian, refuge islands, traffic separators, roundabouts, streetlights and overhead wiring.

If your project has already gone through this review process and received a *Record of Support*, indicate the Mobility Advisory Committee meeting date when support was provided by the Stakeholder Forum.

If your project has permanent reductions subject to this statute but has not gone through this required process, contact your Region Mobility Liaison and Mobility Services Team right away to ensure your project complies with the statute and administrative rule.

SECTION 3: WORK ZONE SAFETY CONSIDERATIONS

Section 3, Question 1

The [Work Zone Safety Guiding Principle](#) directs project design teams to use a full range of options for maintaining a balance between safety and mobility. Options include, but are not limited to:

- Separation of the traveling public from workers and work areas,
- Speed reductions
- Law enforcement
- Enhanced traffic control devices and signage
- Overall roadway and work zone design

The Work Zone Safety Guiding Principle has been incorporated into [Highway Directive TRA 10-16](#). The Directive also requires use of the associated [Work Zone Decision Tree](#) and [Transportation Management Plan](#) in the project delivery process.

Section 3, Question 2

The [Work Zone Decision Tree Form](#) is used to consider planning and design options for projects, including staging, traffic control, separation strategies, public involvement and communications.

The Work Zone Decision Tree becomes part of the project's Transportation Management Plan (TMP). Examples of TMPs and Work Zone Decision Trees from other projects can be viewed on the [Mobility Advisory Committee Meeting Records webpage](#).

Section 3, Question 3

Work shifts and hours for paving projects are shared with the Mobility Advisory Committee (MAC) to address concerns about the amount of time workers are exposed to moving traffic.

Provide the best estimate that you can, based on the information available at the time you complete the checklist. The Mobility Services Team and MAC members understand that the answer provided is ODOT's anticipated work shift information, and that contactors may propose a different plan for completing the work.


SECTION 4: LANE CLOSURE/WIDTH RESTRICTION CONSIDERATIONS

Section 4, Question 1

It is important to answer each of the lettered items (a thru g) for each lane closure/width restriction. **This information is essential for the Mobility Services Team (MST) to determine how the width restriction will impact freight.**

Note that paved width (or horizontal clearance) refers to the entire paved width of the open travel lane(s) between barrier (i.e. soft barrier, hard barrier or equipment) including any paved shoulder capable of supporting freight loads without failure (see examples below). If the available width will vary, indicate the narrowest width that is planned in the work zone.


Figure 7: Examples showing available horizontal clearance through work zones.

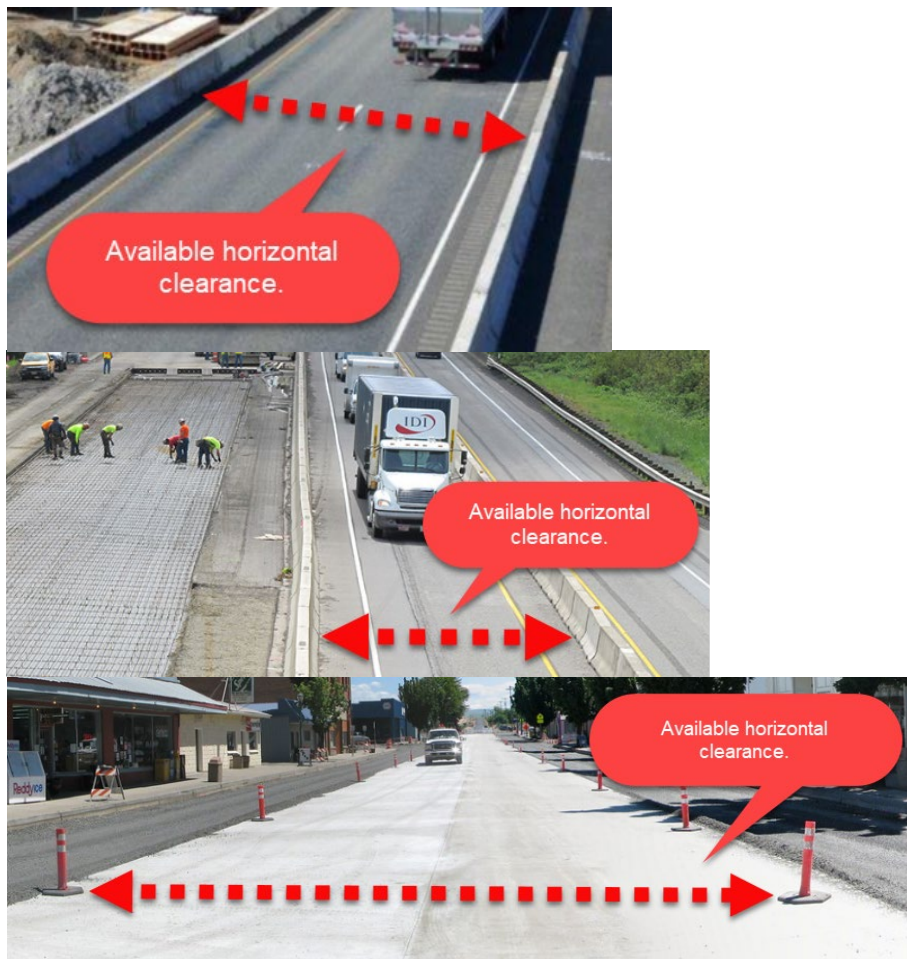

This information is used to determine the actual load width restriction for freight travelling through the work zone. A buffer space is applied to the available width, depending on if the roadway is curved, straight or both. A two-foot buffer is applied for load restrictions on straight sections, and a three-foot buffer is applied to curves (or both straight and curved sections). For curved sections, the buffer assumes the curve is a 5-degree curve (1145'/350 m radius) or less.

For example, a travel lane with 16-feet of horizontal clearance between barriers would result in a 14-foot wide width restriction on a straight section of roadway, and a 13-foot wide width restriction on curve (or a section that is both curved and straight):

Figure 8: Example showing how a load width restriction is determined.

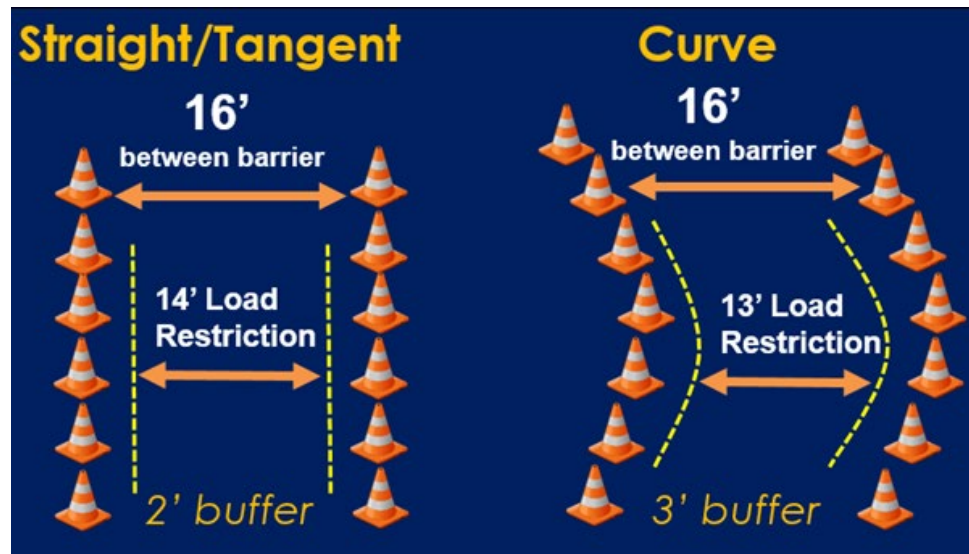

Section 4, Question 2

The MST needs to know if there are lane shifts or lane closures that will divert traffic into a travel lane with less vertical clearance underneath the structure. The MST can look up the vertical clearance information for each travel lane and determine if the lane shift/lane closure will result in a lower vertical clearance.

High loads have specific lane usage required in their permits, since bridges often have varying vertical clearances above different travel lanes (or shoulders).

If the lane closure results in less vertical clearance, and an “up and over” diversion is not available, Over-Dimension permit staff will need to route high loads onto alternate routes, which may include city/county roads.

Figure 9: A lane closure/lane shift under a structure can result in lower vertical clearance



Section 4, Question 3

If travel lane widths will be temporarily reduced, provide the lane widths (e.g. distance between the skip line and shoulder line). This information helps determine impact on wide loads that may not fit within a travel lane.

Figure 10: Illustration showing travel lane width



Section 4, Question 4

This question helps the Mobility Services Team determine pilot car needs, bicycle lane impacts and other concerns. When a roadway is reduced to less than 28-feet of horizontal clearance for two lanes (one way or two opposing lanes), the reduced width could result in a pilot car being required for overwidth loads travelling through the work zone or could create an unsafe condition for an adjacent bicycle lane. Horizontal clearance refers to the entire paved width of the open travel lane(s) between barrier (i.e. soft barrier, hard barrier or equipment) including any usable shoulder.

Also, as required in the [Mobility Procedures Manual](#), the project team must contact the appropriate district office when there will be less than 28-feet for two travel lanes, to determine

if additional pilot vehicles will be needed. Indicate the district's response in this question on the Checklist.

Section 4, Question 5

This question determines if annual over-dimension permit holders will need to be notified of width restrictions. The Commerce and Compliance Division's Over-Dimension Permit Unit issues about 60,000 annual permits each year. The permits are valid for one year and authorize unlimited trips. The CCD Over-Dimension Permits Unit requires a minimum 21-day notification period to provide sufficient time to notify annual permit holders (contractors are required to provide 35-day notification).

The following maps can also be used to help determine allowable daytime and nighttime widths for annual permits:

- [Daylight Width Map](#): Allowable daytime widths for annual (continuous trip) permits
- [Nighttime Width Map](#): Allowable nighttime widths for annual (continuous trip) permits

There are exceptions and route-specific requirements. Contact the [Mobility Services Team](#) for help in answering this question.

Section 4, Questions 6 & 7

In question 6, indicate if all unannounced over-sized loads can be safely accommodated through the work zone (on non-Interstates only) with minimal delay (less than 20 minutes) by moving cones and equipment out of the way.

Accommodating means:

- Able to "wave through" all loads (non-Interstates only) with a slight delay (less than 20 minutes), after moving equipment / traffic control devices to provide at least 22-feet of horizontal clearance.
- No lane shifts/closures beneath structures.
- No ramp closures.
- No vertical clearance reductions.
- No weight or length restrictions.

If the answer is yes, then technically there is no width restriction for the work zone as any oversize load that shows up can be safely waved through. This also means that a width restriction will not be added to the Commerce and Compliance Division's [Active Temporary Restrictions List](#) in the ORION system – meaning that oversize loads will still be permitted through the work zone.

If these requirements cannot be met for unannounced loads, question 7 asks if oversize loads can be accommodated on a case-by-case basis if the motor carrier provides advance notice. If the answer is yes, the Mobility Services Team will need to know how much advance notice is

required. If the answer is NO, be prepared to explain why and indicate if there is a suggested detour route available for the restricted loads that will not be able to get through the work zone.

Also important to note for both questions 6 & 7: the project team should consider if the route is used by overwidth farm implements. (Farm implements are exempt from obtaining overwidth permits on non-interstate highways.)

SECTION 5: ROAD CLOSURE CONSIDERATIONS

Full road closures are addressed separately on the Checklist, due to the impact they have on the full spectrum of vehicles that use the affected route. Road closures can be particularly impactful if they are planned on interstates or Critical Route Pairs

Provide road closure information, including direction of travel and duration (including the allowable days and hours for the closure).

If you are planning a road closure, you will also need to provide detour information in Section 7 of the checklist. Any associated ramp closures must also be addressed separately in Section 6.

SECTION 6: RAMP CLOSURES/WIDTH RESTRICTIONS CONSIDERATIONS

Ramp restrictions must be addressed separately from lane and road closures so the Mobility Services Team can determine if the work affecting the ramp will end sooner than the duration of the work affecting the lane or road closure. This information also helps Mobility Stakeholders understand the actual duration times of each type of project work.

If the project involves ramp closures, you will also need to provide detour information in Section 7 of the checklist.

Section 6, Question 1

Be sure to provide specific ramp numbers and/or names to clearly identify them on the checklist. Single Trip Over-Dimension Permits are issued for over-dimension loads with specific routes the carrier must follow, including which exit to take or ramp to enter from, based on the dimensions of the load. Many ramps are also used as “up and over” detours to avoid low structures on the highway. Closure of an on or off ramp that removes the “up and over” option for high loads and may result in a hit to a structure or cause other loads to be routed onto unauthorized routes that have not been reviewed for the size/weight of the load.

Section 6, Question 2

The Mobility Services Team needs to know the anticipated days and hours of the ramp closures to help with managing highway restriction notices.

Section 6, Question 3

Provide ramp width restriction information (if applicable). Most ramp work results in a closure, but there are some occasions when a ramp only needs to be width restricted. As with lane width restrictions (see [Section 5](#)), this information is used to determine what the actual load width restriction will be for the ramp.

SECTION 7: DETOUR ROUTE CONSIDERATIONS

The questions in this section are intended to ensure that any planned detours take into account and provide for all traffic that is legally allowed to use the route that will be closed, including freight and over-dimension units.

Communication and engagement of industry stakeholders are an integral part of freight mobility during the development of detours. During project development, the Mobility Services Team needs to be notified about any planned off-site detour routes.

The Mobility Services Team will work the Region Mobility Liaison and project team leader/manager to engage industry stakeholders for the development of detours. The Mobility Services Team can also provide over-dimension routing data to help identify suitable detour routes. The Mobility Services Team can also work with trucking industry stakeholders to arrange for a freight vehicle to drive the proposed route to check for any issues.

Section 7, Question 1

If a road closure is planned, describe the approved detour route in this question. Approval information needs to be provided for Questions 7 or 8 (depending on the detour route).

Section 7, Questions 2 & 3

If over-dimension units use the existing route but cannot use the detour route, then either a different detour route is needed, or a second detour route specifically for over-dimension units is needed.

Section 7, Question 4

Detour routes need to be checked for any overhead obstructions that will impact vertical clearance. This can include structures, wires, traffic signal heads, and overhanging trees.

Legal height is 14-feet. Annual over-dimension permits allow loads up to 14-feet, 6-inches high on approved routes (see the [Freight Mobility Over-Height Map](#)). Single-trip over-dimension permits allow loads even higher on routes specified in their permit.

Section 7, Question 5

Structures on detour routes need to be checked for weight restrictions.

A [Weight Restricted Bridges List for State Highways](#) can be found on the Commerce and Compliance Division's website.

Weight restrictions over non-state structures should be verified through the local jurisdiction.

Section 7, Question 6

Detour routes need to be checked for length restrictions. Length restrictions are often caused by roadway curvature. Turning movements need to be evaluated to see if they safely provide for turning movements and off-tracking.

Section 7, Question 7

Detours that use local city/county roads must be approved by the local jurisdiction.

Section 7, Question 8

On state detour routes, some oversize loads (such as triple trailers) might be authorized for the route that will be closed but not authorized for the state route that is planned for the detour.

In those cases, approval from the appropriate ODOT District Road Authority is required. Contact the [Mobility Services Team](#) for help determining if District approval will be needed.

Section 7, Question 9

Indicate if the detour route will be signed, and if so, provide any signing plans if available.

Section 7, Questions 10 & 11

If ramp closures are planned, provide the detour routes in Question 10. For "next exit" detours, indicate how this will be communicated to drivers.

For Question 11, detours that instruct to reverse direction need to be checked to ensure overheight loads are not routed under structures with lower vertical clearance. Vertical clearance can vary underneath structures, depending on the lane (and shoulder) that will be used by overheight loads.

SECTION 8: SPECIAL DETOUR ROUTE CONSIDERATIONS

Special detour route considerations include emergency services response times, vehicles transporting hazardous materials, and if there other projects along the detour route that will restrict traffic.

If out-of-distance travel or detour delay times are excessive, then special coordination with emergency services must be made. If hazardous material is transported along the existing route,

then the detour route must be evaluated to see if it can accommodate it as well. If there is a conflict with other projects, then the work should be rescheduled to eliminate the conflict.

A back-up detour route should always be identified in case of a natural disaster or unplanned restriction on the proposed detour route.

SECTION 9: CRITICAL ROUTE PAIR CONSIDERATIONS

ODOT is committed to keeping freight moving safely and efficiently throughout Oregon in support of the State's economy. If a route needs to be restricted, ODOT will collaborate closely with the freight industry to minimize the impact of construction projects on mobility.

If a route that is identified on the list of Critical Route Pairs (see below) needs to be temporarily restricted, ODOT will take steps to make sure that the paired critical route on the list is not restricted. A [Critical Route Pair Interactive Map](#) is also available to view the location of the paired routes, and a [Critical Route Pair GIS map](#) is available to view projects with planned restrictions on these routes.

Table 1: Critical Route Pairs

Highway	Paired With	Area
I-5	OR 212, US 26, US 97	Washington - California
I-84	OR 212, US 26, US 97, US 20 (Sometimes includes OR 78 and US 95)	Portland - Ontario
US 30	US 26	Portland - Coast
OR 22 & OR 18	US 20	Willamette Valley – Coast
OR 126	OR 38	Willamette Valley – Coast
OR 38	OR 42	I-5 - Coast
OR 126	OR 58	I-5 – Central Oregon

It is essential to communicate within a region, between regions, and statewide in development, construction, and maintenance to ensure an identified alternate critical route pair will not be concurrently restricted. A local detour is acceptable if it provides the shortest practical distance and will accommodate vehicles of the same weight and dimensions that are normally allowed on the route under construction.

If your project takes place on a Critical Route Pair, work with the appropriate Region Mobility Liaison to confirm that there are no conflicts with other projects taking place on the paired route. Contact information for the Region Mobility Liaisons can be found on the [Mobility Program web site](#).

Conflicting restrictions on Critical Route Pairs are considered a high impact that must be shared at a Mobility Advisory Committee meeting, as per the project review criteria in [Appendix C](#) of the MAC Charter. If you answered yes to this question on the Checklist, name the conflicting project(s) on the paired route and describe the restrictions and/or delays. Also indicate the steps that were taken to mitigate the conflict as required in the [Mobility Procedures Manual](#).

SECTION 10: HEIGHT, LENGTH & WEIGHT CONSIDERATIONS

Section 10, Question 1

ODOT's [Size and Weight Restrictions Policy \(PMT 06-01\)](#) provides specific guidelines for weight restrictions that must be followed when load rating factors show insufficient load capacity for unrestricted use by permit vehicles.

Some examples of temporary weight restrictions:

- Some weight restricted bridges require overweight loads to straddle the center line. If a lane on a bridge needs to be restricted preventing overweight loads from straddling the centerline, a temporary weight restriction may be needed until the lane restriction is lifted.
- Bridge containment systems can sometimes add significant load to a bridge, requiring a temporary weight restriction until the containment system can be removed.

Describe the weight restriction that will be needed and indicate the impact on annual or single trip over-dimension permits.

Contact the [Mobility Services Team](#) if you are not sure of the impacts.

Section 10, Question 2

If your work zone will have curves of more than 5-degrees, oversize loads may need to be restricted to prevent off tracking.

Section 10, Question 3

Indicate if the vertical clearance for traffic will be reduced due to temporary structures, equipment or obstructions over the roadway. However, do not use this section to report vertical. Any temporary reduction in vertical clearance requires coordination with the Mobility Services Team to determine impacts to freight and (if necessary) share with the Mobility Advisory Committee for stakeholder input.

Examples include temporary traffic signals, bridge false work and bridge containment systems.

SECTION 11: MOBILITY COMMUNICATIONS CHECKLIST

The purpose of the Communications Checklist is to ensure mobility-related coordination and stakeholder engagement steps have taken place, as appropriate, for the project. Review the guidance below for each of the numbered rows.

Figure 11: Mobility Communications Checklist

SECTION 11			
MOBILITY COMMUNICATIONS CHECKLIST			
YES	NO	NA	ACTION
☐	☐	☐	Contacted the ODOT Statewide Mobility Team early in project development, <i>prior to DAP</i> , to identify potential mobility and work zone safety impacts, and allow time for review.
☐	☐	☐	Provided the ODOT Statewide Mobility Team with current copy of TMP/Work Zone Decision Tree/Traffic Control Plan.
☐	☐	☐	For projects with planned restrictions on Critical Route Pairs (CRP), confirmed with the Region Mobility Liaison that the project information will be added to the CRP List on the Mobility Program SharePoint site, so that the project will be posted to the CRP GIS Map .
☐	☐	☐	Met with the Mobility Advisory Committee (if needed) to share project and seek support.
☐	☐	☐	Met with the Mobility Advisory Committee per the Highway Roundabout Directive DES 02 to ensure freight movement, including over-dimension loads, can be accommodated through the roundabout; and a document memorializing roundabout decision was issued.
☐	☐	☐	Identified which part of the industry is affected by restriction, (e.g. annual permit holders vs. single trip permits). Contact the ODOT Statewide Mobility Team for help determining.
☐	☐	☐	Additional coordination is required with the ODOT Statewide Mobility Team .
☐	☐	☐	Provided project information to the Region Mobility Liaison.
☐	☐	☐	Considered impacts and confirmed inclusion of local events and special travel days within project Special Provisions prior to start of restriction.
☐	☐	☐	Identified the need during construction to provide Work Zone Notification 35 day written notice to the ODOT Statewide Mobility Team prior to start date of restriction per ODOT Standard Specifications 00220.03(a) .
☐	☐	☐	Project restrictions are supported by the Mobility Program and if needed the Mobility Advisory Committee. Attach email(s) and/or Mobility Advisory Committee meeting minutes indicating Mobility Program support.
Worked with the following groups to identify and resolve any potential conflicts: ☐ District Maintenance Staff ☐ Consultants ☐ Local Road Authorities ☐ Local Utilities ☐ Rail Authorities ☐ Not Applicable			

1. If your project has mobility impacts or if you are not sure of potential impacts, early communication with the Mobility Services Team prior to DAP is essential to identify issues and engage with stakeholders to seek options and solutions.
2. Current copies of the Transportation Management Plan, Work Zone Decision Tree and Traffic Control Plan must be provided to the [Mobility Services Team](#) before the Mobility

Mobility Considerations Checklist Guide

Considerations Checklist can be signed. If changes are made to any of these documents that impact mobility, make sure the changes are also reflected in the Checklist and shared with the Mobility Services Team.

3. If your project has planned restrictions on a Critical Route Pair, check this box to confirm that the Region Mobility Liaison has added the project information to the [CRP SharePoint List](#) which is used to publish to the [CRP GIS Map](#). This map is used by the Regions to coordinate restrictions on CRPs to avoid conflicts.
4. The [Mobility Services Team](#) will review the impacts in the checklist to see if/how they need to be shared with the Mobility Advisory Committee (MAC) according to the project review criteria in [Appendix C](#) of the MAC Charter. [Section 5](#) of the [Mobility Procedures Manual](#) also provides requirements and guidance for engaging with the MAC.
5. [Highway Roundabout Directive DES 02](#) establishes the expectation and processes concerning freight mobility to be followed whenever a roundabout is proposed to be installed on the state highway system. This includes engagement with the trucking industry (via the Mobility Advisory Committee) which is coordinated through the Mobility Services Team.
6. The [Mobility Procedures Manual](#) provides information on the over-dimension permitting process. The types of loads that travel through a project area can vary, depending on the specific route, time of day and the type of permit. If you are not sure of the impacts, contact the [Mobility Services Team](#) for help.
7. Occasionally, a project may require additional follow up on mobility-related issues and concerns.
8. Per the [Mobility Procedures Manual](#), Transportation Project Managers/Resident Engineers/Resident Engineers - Consultant Projects are responsible for involving the Region Mobility Liaison early in the planning process when mobility issues are identified, including potential reduction in capacity (ORS 366.215) design conflicts, potential detour routes, delays and planned restrictions. Contact information for the Region Mobility Liaisons can be found on the [Mobility Program web site](#).
9. Holidays and special events must be considered when planning restrictions. Oregon Standard Specifications for Construction - Number 00220.40(e)(2) defines the time frames when traffic lanes must be kept open for holidays and special events. Boilerplate Special Provisions to the Standard Specifications are available online.
10. Per the [Mobility Procedures Manual](#), contractors and other non-ODOT submitters must submit the online [Highway Restriction Notice Form# 734-2357](#) at least 35 days prior to work beginning for Resident Engineer review. Once the resident engineer has reviewed

Mobility Considerations Checklist Guide

the notice to ensure it is consistent with the signed Mobility Considerations Checklist, they (or the Region designee) will enter the restriction into the CCD ORION system at least 21 or 14 days prior to work beginning (depending on the type of restriction).

11. The Mobility Program and mobility stakeholder support for proposed restrictions must be documented with the Mobility Considerations Checklist. Attach copies of emails and/or meeting minutes with your completed Checklist.
12. Depending on the mobility impacts in your project, different groups may need to be consulted to identify and resolve issues. Check the groups as appropriate for your project.

SECTION 12: ADDITIONAL COMMENTS/NOTES

Use this section to provide any additional mobility-related information or comments about your project that may not have been addressed in the other sections of the Checklist.

SECTION 13: SUBMITTAL INSTRUCTIONS

Transportation Project Managers/Resident Engineers:

Check each box to confirm completion of each item in the Submittal Instructions.

Transportation Project Managers, Resident Engineers and Resident Engineers - Consultant Projects:

It is essential to communicate any changes to restriction plans and mobility impacts that are documented in the signed Mobility Checklist. If changes occur that have the potential to affect mobility, follow the steps in this section before submitting a Highway Restriction Notice for the proposed restriction revisions.

SECTION 14: SIGNATURES

The Region Project Lead must sign and date the completed form (digital signatures are acceptable). The Mobility Program Manager signature is only required if your project has mobility impacts (see [Section 1](#)). Refer to [these instructions](#) for digitally signing the Checklist.

Note: If the Checklist needs to be revised due to changes that affect mobility impacts, the changes must be signed off again after the Mobility Services Team reviews the updated Checklist and (if necessary) shares the impacts with the Mobility Advisory Committee (per the project review criteria for proposed changes in [Appendix C](#) of the MAC Charter). Additional signature blocks will appear at the bottom of the form when a revision checkbox is marked in Section 1. Refer to the [Checklist Revisions](#) chapter of this guide for more information.

FAQs

1. When considering if a project has “No Mobility Impacts:” what if we have an existing highway where the existing width already falls within the threshold for requiring a restriction notification before any work begins (e.g. a tunnel with less than 28-feet of horizontal clearance for two lanes of one-way traffic)?

Figure 12: Example where the existing clearance is less than 28-feet for two lanes.



We recognize there are some routes where the existing roadway is narrower than the minimum width needed for there to be no restriction notification required.

In situations like this, contact the [Mobility Services Team](#) so we can have a conversation about your project and confirm any impacts to mobility.

2. When answering the paving work question in Section 3, is it ok to guess how many shifts and hours per shift that are planned for the project?

Provide the best estimate that you can, based on the information available at the time you complete the checklist. The Mobility Services Team understands that the answer provided is ODOT’s anticipated work shift information and that contractors may propose a different plan for completing the work.

3. Do you have a definition of a curve that could cause a length restriction?

In general, work zones and detours that have a high degree of curvature (more than 5-degrees) may require a length restriction to prevent off-tracking.

Mobility Considerations Checklist Guide

- 4. Regarding accommodating oversize loads (Section 4, Questions 6 & 7), shouldn't we wait for the contractor to answer these questions since they may not agree with our response?**

The Checklist is intended to be ODOT's anticipated plan for addressing work zone safety and mobility impacts so that we can provide for stakeholder input before a project goes out to bid. The Mobility Services Team understands that contractors may propose a different approach when bidding a project, and that proposed changes will be brought back to the Mobility Services Team for review before any agreements are made with the contractor. Proposed changes that have the potential to adversely affect mobility or run counter to previous stakeholder agreements must be shared with the Mobility Services Team and possibly with the Mobility Advisory Committee to discuss and obtain support for the proposed changes.

- 5. If submitting a draft Checklist to the Mobility Service Team to get initial feedback (e.g. early communication, prior to DAP), are we required to attach supporting documents?**

If you are seeking early input from the Mobility Services Team about a particular mobility issue, you can [email the team](#) with your questions without providing the Checklist and supporting documents if they are not quite ready to share.

The Mobility Services Team can help identify oversize load permit impacts and detour route information, and can seek feedback from stakeholders on potential staging options as the TMP is being developed. A current copy of the TMP, TCP and Work Zone Decision Tree will need to be submitted with the Checklist (for projects with Mobility impacts), before the Checklist can be reviewed and signed off.

- 6. Where can I find a blank copy of the Mobility Considerations Checklist?**

The Checklist is available to download at the following link:

<https://www.oregon.gov/ODOT/Forms/Motcarr/9983fill.pdf>. A link to the form is also available at:

- The external [Statewide Mobility Program website](#) on Oregon.gov.
- The Mobility Program [Internal SharePoint site](#).
- The internal [Project Delivery Portal SharePoint site](#).

- 7. For large or complex projects, can I attach documents to the Checklist if there is too much information to enter for some of the questions?**

The Checklist has expandable fields that allow for unlimited text to be entered. The fields expand as text is entered so that all of the information will display and print on the form.

Mobility Considerations Checklist Guide

The intent of the Checklist is to summarize all of the mobility impacts from your project so that the Mobility Services Team can efficiently review and share with stakeholders without having to sort through multiple documents. It is ok to attach additional documents to the form, provided there is enough information entered on the Checklist to determine the mobility impacts.

8. In Section 2, Question 3, why does the form ask for the number of construction seasons?

This information is needed in order to coordinate Critical Route Pair restrictions (if needed) as well as allow industry stakeholders to determine feasibility of moving loads.

9. For Section 7, what are the expectations for checking and evaluating detour information?

If a detour cannot accommodate all freight traffic that normally uses the route that will be restricted, an alternate route needs to be identified for the affected vehicles.

The Mobility Services Team can provide over-dimension routing data to help identify suitable detour routes. The Mobility Procedures Manual also recommends testing the route with a truck for potential problems. The Mobility Services Team can help coordinate a test with industry stakeholders, if necessary.

10. If my project does not go through the Project Controls Office, do I need to submit a Mobility Considerations Checklist to the Mobility Services Team?

Completion of the Checklist is required for all state and federally funded projects on state highways. A Checklist is not required, for maintenance projects, but is strongly recommended.

LINKS TO OTHER DOCUMENTS & WEBSITES

Below is a list of hyperlinks to documents and websites referenced in this guide:

- Cross Reference Table of Highway Route Number to State Highway Number:
<https://www.oregon.gov/ODOT/Data/Documents/Routes-to-Highway-Cross-Reference-Table.pdf>
- Freight Mobility Daylight Width Map:
<https://www.oregon.gov/odot/ProjectDel/Mobility/DaylightWidthMap.pdf>
- Freight Mobility Nighttime Width Map:
<https://www.oregon.gov/odot/ProjectDel/Mobility/NighttimeWidthMap.pdf>
- Freight Mobility Over-Height Map:
<https://www.oregon.gov/odot/ProjectDel/Mobility/OverHeightMap.pdf>
- ORS 366.215 Implementation Guidance:
https://www.oregon.gov/odot/Planning/Documents/ORS_366.215_Implementation_Guidance.pdf
- Highway Directive TRA 10-16 (Guiding Principle for Work Zone Safety):
https://www.oregon.gov/ODOT/Engineering/Doc_TechnicalGuidance/TRA10-16d.pdf
- Highway Restriction Notice Form #734-2357:
<https://www.oregon.gov/odot/Forms/2ODOT/7342357.pdf>
- Highway Restriction Notice Procedures for Construction and Maintenance Work:
<https://www.oregon.gov/odot/MCT/ODPermitSystemProjectDocuments/Highway-Restriction-Notice-Procedures-ORION.pdf>
- Highway Roundabout Directive DES 02:
https://www.oregon.gov/ODOT/Engineering/Doc_TechnicalGuidance/DES_02.pdf
- Mobility Considerations Checklist Form (blank form):
<https://www.oregon.gov/ODOT/Forms/Motcarr/9983fill.pdf>
- Mobility Advisory Committee Charter:
<https://www.oregon.gov/odot/Get-Involved/MAC/MACCharterandAppendices.pdf>
- Mobility Advisory Committee Agenda Submittal Form and other meeting preparation resources:
<https://ordot.sharepoint.com/sites/Mobility/SitePages/PrepareForMACMeeting.aspx>
- Mobility Meeting Guidelines (Mobility Advisory Committee Charter, Appendix D):
<https://www.oregon.gov/odot/Get-Involved/MAC/MACCharterAppendixD.pdf>
- Mobility Procedures Manual:
<https://www.oregon.gov/odot/ProjectDel/Mobility/MobilityProceduresManual.pdf>

Mobility Considerations Checklist Guide

- Mobility Project Review Criteria (Mobility Advisory Committee Charter, Appendix C):
<https://www.oregon.gov/odot/Get-Involved/MAC/MACCharterAppendixC.pdf>
- Mobility SharePoint Site (ODOT intranet):
<https://ordot.sharepoint.com/sites/Mobility>
- Mobility Services Team E-Mail Address:
PDS-MobilityServices@odot.oregon.gov
- Project Delivery Operational Notice PD-16:
https://www.oregon.gov/ODOT/Engineering/Doc_TechnicalGuidance/PDLTNotice_16.pdf
- ODOT Construction Manual:
https://www.oregon.gov/ODOT/Construction/Doc_ConstructionManual/cm11.pdf
- Oregon Administrative Rule Chapter 731, Division 12 – Reduction of Vehicle Carrying Capacity:
https://secure.sos.state.or.us/oard/displayDivisionRules.action;JSESSIONID_OARD=dbDvmp6rE7oU9CWLKkjZyu_-wLrKAXRpHS2Slhc568XY6YeBOvXx!-1599462816?selectedDivision=3274
- Oregon Standard Specifications for Construction:
https://www.oregon.gov/odot/Business/Pages/Standard_Specifications.aspx
- Oregon Revised Statute 366.215:
https://www.oregonlegislature.gov/bills_laws/ors/ors366.html
- Project Delivery Portal Internal SharePoint Site:
<https://ordot.sharepoint.com/sites/ProjectDelivery>
- Statewide Mobility Program Website on Oregon.gov:
<https://www.oregon.gov/odot/ProjectDel/Pages/Mobility.aspx>
- Statewide Mobility Program Internal SharePoint Site: <https://ordot.sharepoint.com/sites/Mobility>
- Temporary Work Zone Impacts Presentation Template (for sharing temporary mobility impacts, if necessary, with the Mobility Advisory Committee):
https://www.oregon.gov/odot/ProjectDel/Mobility/MAC_Temp_Impacts_Template.pptx
- Transportation Management Plan Guidance Manual:
https://www.oregon.gov/ODOT/Engineering/Docs_TrafficEng/TMP-Manual.pdf
- Work Zone Decision Tree form:
<https://www.oregon.gov/ODOT/Forms/2ODOT/7345042.pdf>
- Work Zone Safety Guiding Principle:
https://www.oregon.gov/ODOT/Engineering/Docs_TrafficEng/Work-Zone_Guiding-Principle.pdf